

# PORTLAND

WOOL TWIST

Appearance

Durability

Resilience

Soft touch

Practical



A SOFT DURABLE CARPET WITH A RANGE OF SUBTLE SHADES

Natural. Sustainable. Performance

**danfloor**  
An Ulster Group Company



The beautifully crafted Portland Wool Twist combines a natural product with a range of subtle shades to cover your floor with a soft yet durable carpet.

Using an 80% wool 15% polypropylene mix the Portland Collection is able to provide extreme durability and performance. The pile shape and height enable the product to recover quickly from elements of compression making it ideal for all locations including corridors and communal areas. The mix of fibres also provide a carpet which accepts and retains colour and offers fantastic stain resistant properties, making it a practical flooring solution to maintain.

### The finest carpet yarn

Wellbeing within your environment is extremely important and the Portland Wool Twist carpet collection can contribute towards a healthy internal environment because of its inherent natural properties:

Flame resistance – Wool does not ignite or release noxious fumes due to the natural structure of its fibres

Reduces static electricity – Wool has a lower residual voltage compared to man-made fibres

Anti-allergy – Like any carpet wool rich carpets reduce airborne dust by trapping particles within its fibres. Wool does not promote the growth of bacteria and is unsuitable for dust mites and moths.

Improves indoor air quality – Wool naturally absorbs humidity and airborne toxins producing a cleaner and comfortable living environment.

Soft landing – If accidents do occur on carpet the soft cushioned landing of the Portland Wool Twist can help reduce impact injuries.

### A Natural Product

With increasing knowledge of how products and purchases can affect the environment choosing a wool mix product contributes to the preservation of our environment without compromising on performance or that feeling of having a luxury product at your feet.

Wool is a natural and sustainable fibre which is biodegradable and recyclable, resulting in many positive effects for our environment. Wool mix carpets are also extremely energy efficient. In the home approximately 10-20% of heat is lost through the floor. Wool carpets insulate the home and can save an average of 11% on domestic energy consumption.

Portland Wool Twist is an environmentally focused product that offers fantastic performance features and a luxurious finish.



PORTLAND WOOL TWIST



7750 903



7750 905




7750 950



7750 961



7750 970

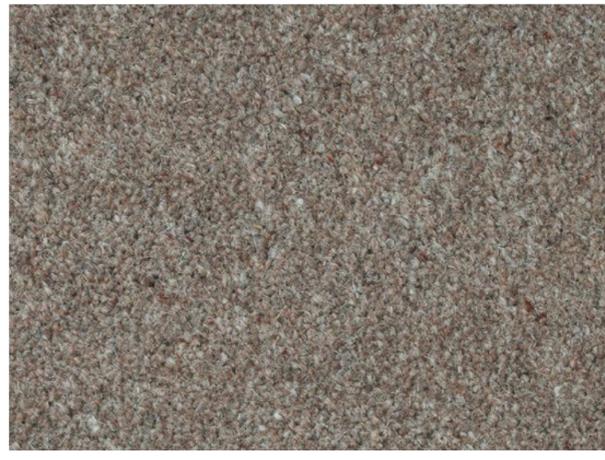

7750 928


PORTLAND WOOL TWIST



7750 999



7750 935

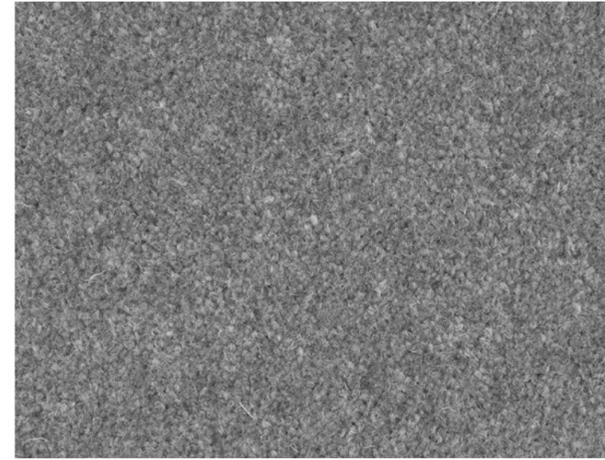

7750 916



7750 908



7750 907



7750 902

TECHNICAL SPECIFICATION	PORTLAND WOOL TWIST	
<b>Design Pattern Identification</b>	7750 (50oz)	7740 (40oz)
<b>Method of Manufacture</b>	Tufted Cut Pile	Tufted Cut Pile
<b>Gauge</b>	1/8"	1/8"
<b>Measures</b>	Rolls, approx. 400cm wide	Rolls, approx. 400cm wide
<b>Pile Material</b>	80% Wool, 15% PP, 5% Pest Meltbond	80% Wool, 15% PP, 5% Pest Meltbond
<b>Pile Weight</b>	approx. 1700 g/m <sup>2</sup>	approx. 1350 g/m <sup>2</sup>
<b>Total Weight</b>	approx. 2500 g/m <sup>2</sup>	approx. 2150 g/m <sup>2</sup>
<b>Pile Height</b>	7.00mm	6.00mm
<b>Total Pile Height</b>	10.50mm	9.50mm
<b>Backing</b>	Jute	Jute
<b>PERFORMANCE TEST</b>		
<b>Flammability / Burning Classification</b>	Cfl-s1	Cfl-s1
<b>Colour Fastness</b> Light (1-8) Scale	Min 4	Min 4
<b>Rub Fastness</b> Water (1-5) Scale	Min 3	Min 3
<b>Thermal Resistance</b>	0.18 M2 K/W (Tog 1.8)	0.18 M2 K/W (Tog 1.8)

## Colour Selection

Although the Portland Twist collection is designed to minimise visual soiling, it is strongly recommended that care be taken in choosing colours to suit particular locations. Medium to dark coloured carpets disguise soiling more effectively than plain, light shades and should therefore be considered for high traffic areas such as corridors.

## Tolerances

Product specifications are derived from averages in yarn, fibre, temperature and colour which may vary within the standard industry tolerances. Performance is not affected by such variations.

## Pressure Markings

Pressure marks result during the manufacturing of large rolls of carpet. These faint lines can also be a result of rolls resting in racks where they are subjected to considerable pressure. As a result unavoidable pressure lines are often visible when the carpet is first unrolled, but should not cause any concern. The lines will not affect performance and will disappear within a few weeks of normal use. Thorough and regular vacuuming can also assist with removing the lines.

## Care & Maintenance


Carpet should be cleaned daily with a vacuum cleaner, preferably one with a beater action. Spillages should be taken up promptly and surface stains removed by an appropriate method as soon as possible. Instructions for the maintenance of carpets are available from danfloor upon request or can be downloaded from [www.danfloor.co.uk](http://www.danfloor.co.uk). It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Chair pads are required under roller castor chairs to prevent accelerated wear and to preserve appearance retention.

## Backing

The jute backing is a non-impervious backing that is flexible, strong and resilient. It's suitable for all traditional fit applications that require grippers and underlay, including stairs. The Portland Twist collection is compatible with underfloor heating.

## Installation

Prior to cutting and installation all carpets should be unrolled and inspected to ensure all quality standards have been met. Prior to installation approval should be sought with the client as to the location of all joints. Installation must be carried out by an approved carpet installer in accordance to BS5325:2001. A full Installation Guide, including recommended adhesives, can be downloaded from [www.danfloor.co.uk](http://www.danfloor.co.uk)

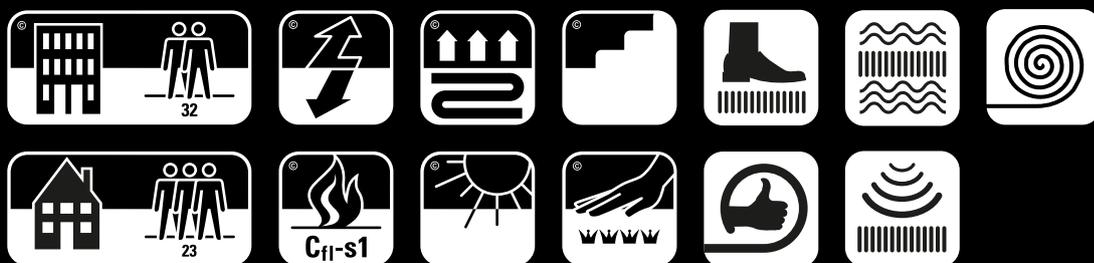

**WOOLMIX**

**danfloor**  
An Ulster Group Company

Innovative Carpet Solutions

**danfloor Uk Ltd**  
106 Longmead Road, Emerald Park, Emersons Green  
Bristol BS16 7FG, United Kingdom  
T: 0333 014 3132, F: 0333 014 3134  
E: [info@danfloor.co.uk](mailto:info@danfloor.co.uk)

**Danfloor Denmark**  
danfloor a/s, Østerbro 9, DK-6933 Kibæk  
T: +45 9699 1900, F: +45 9699 1999

[www.danfloor.co.uk](http://www.danfloor.co.uk)