


TECHNICAL ADVICE

Bowing

At danfloor we adhered to the European Standard for Textile Flooring Covering EN14159 which refers to the requirements for tolerances on linear dimensions of wall to wall carpet and for tolerances on pattern repeat, specifying the maximum accepted tolerance on the dimensions and distortions in broadloom carpets.

With patterned carpets, especially those that incorporate a linear design, danfloor highly recommends that the carpet be fitted on the linear as the slabbing of such products could potentially show a bow effect.

Pattern Bowing: Bowing occurs when seams or patterns are stretched out of alignment, curving away from and back towards a seam or centring point and appears a little like the pattern has "sagged" in the middle. Viewing the carpet across the width, the pattern distortion is seen as wavy or crooked lines of pattern. Danfloor works within a tolerance of 40mm on a 4mtr wide carpet as detailed within EN14159.

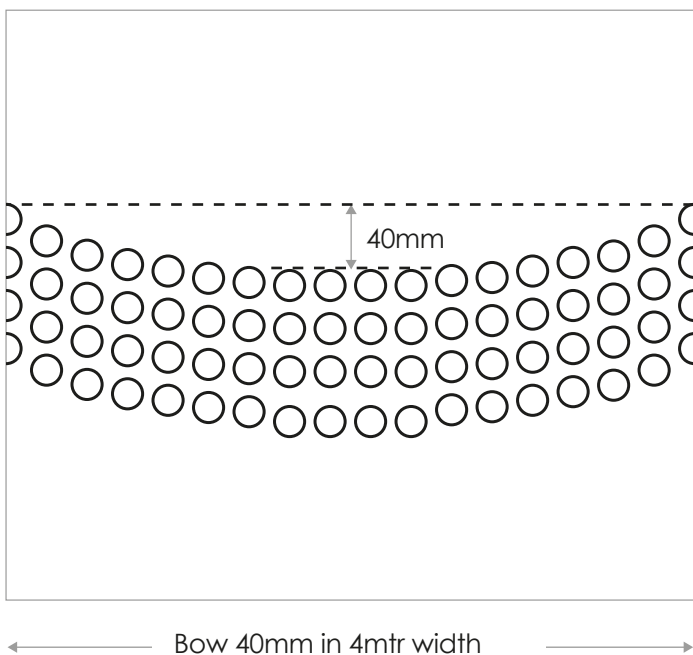

danfloor recommends

- Before starting installation inspect for: Concealed damage, Manufacturing defects and Shipping errors (example: wrong colour, style, etc.)
- Warranties specifically exclude claims involving carpet which has been cut and installed with visible manufacturing defects.